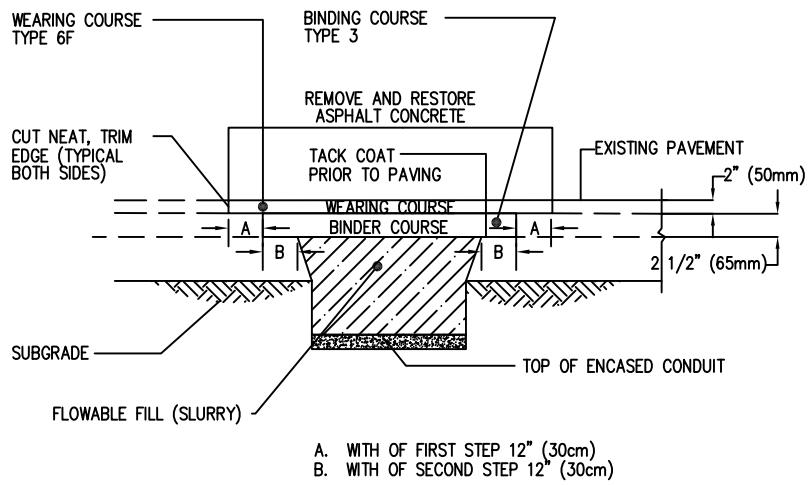


FLEXIBLE PAVEMENT RESTORATION
NOT TO SCALE

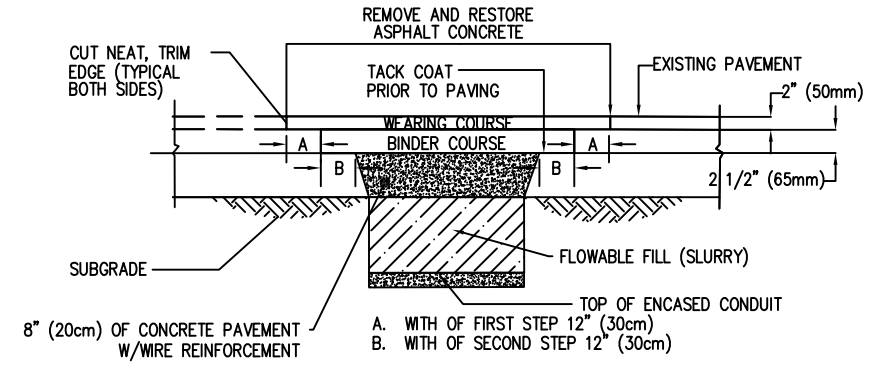


FLEXIBLE PAVEMENT RESTORATION
NOT TO SCALE

NOTES:

1. NUMBER OF ENCASED CONDUITS IN TRENCH AS INDICATED ON PLANS.
2. THERE MUST BE A MINIMUM OF 1.5 INCHES (3.8 cm) OF CONCRETE UNDER THE CONDUITS.
3. THIS DRAWING IS PROVIDING FOR GENERAL GUIDANCE ONLY. WHEN A STEPPED CUTBACK IS REQUIRED, CONSULT WITH THE AHJ ON WIDTH AND NUMBER OF STEPPED CUT.

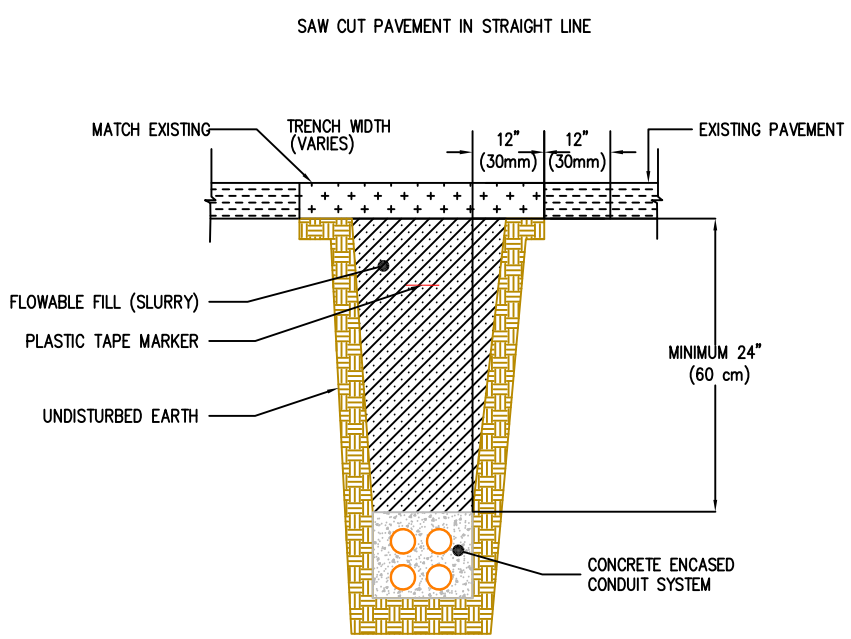


TYPICAL TRENCH CONSTRUCTION AND
PAVEMENT REPLACEMENT DETAIL
FOR ROADWAYS AND PARKING AREAS
NOT TO SCALE

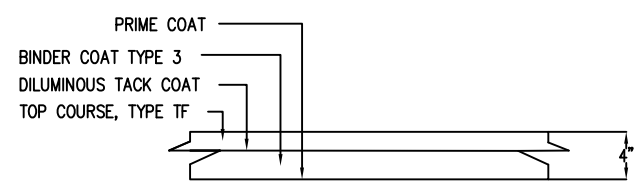


ENLARGED VIEW
NOT TO SCALE