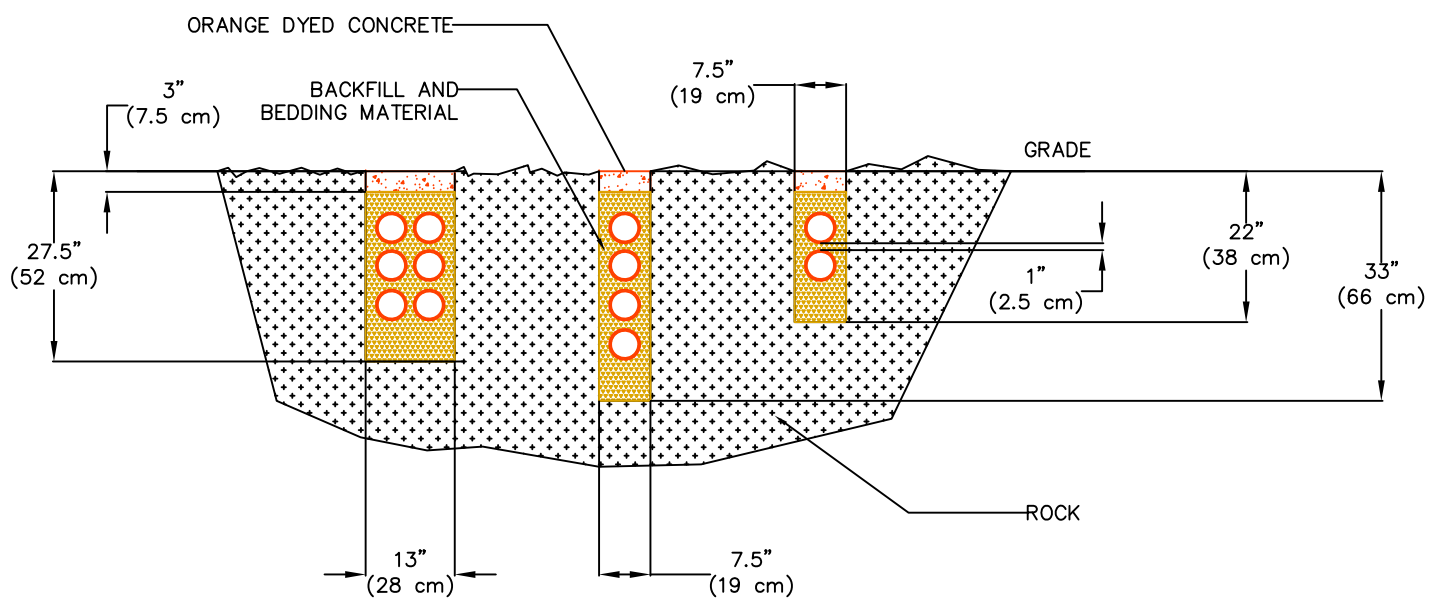


NOTES:

1. TRADE SIZE SCHEDULE 40 4" (100 mm) CONDUITS DEPICTED IN THE FORMATIONS.
2. SPACING BETWEEN CONDUITS SET 1" (2.5 cm). THIS IS THE MINIMAL ALLOWED SPACING. THIS ONLY APPLIES FOR CONDUIT PLACEMENT IN SOLID ROCK.
3. CONDUITS BEDDING MATERIAL MUST BE A MINIMUM OF AT LEAST 6" (15 cm) OF MATERIAL.
4. THE BEDDING AND BACKFILL MATERIAL MAYBE THE SAME.
5. THE MINIMAL SPACE BETWEEN THE TRENCH WALL AND THE CONDUITS IS 1.5" (4 cm).
6. THE TRENCH MUST BE CAPPED WITH A MINIMUM OF 3" (75 cm) OF ORANGE DYED CONCRETE.